



## U.S. BASED SUPPORT

**HOURS: MONDAY - FRIDAY | 8AM - 5PM EST**



**[1.410.840.3555](tel:14108403555)**




**[support@iagoffroad.com](mailto:support@iagoffroad.com)**



**VIDEO INSTRUCTIONS**

**<https://iagoffroad.com/vi/IAG-ACC-F1087>**

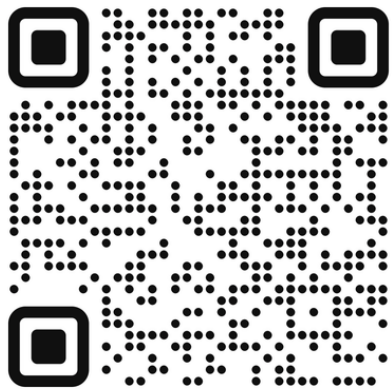

**SCAN ME**



**IAG OFF-ROAD  
TAILGATE TABLE LIGHT  
FOR 2021+ BRONCO**



***IAG Off-Road***  
**Tailgate Table Light**  
**For 2021+ Bronco**

**Part Number: IAG-ACC-F1087**

Congratulations on the purchase of your Tailgate Table Light, and thank you for choosing IAG Off-Road!

These instructions are intended for users with basic mechanical skills. Professional installation is not required.

Installation video can be found on our website, or by using the following QR code.

**Tools Needed:**

Socket/Wrench Sizes:

- 10mm
- 8mm
- 4mm Allen

Other Tools:

- Plastic Trim Pry Tool
- Cutting Pliers

Scan or click QR code for instruction video:



**Parts Included:**

- 1 IAG Tailgate Table Light**
- 2 IAG Light Bracket**
- 3 Extension Harness**
- 4 (X2) Wire Harness Clips**
- 5 4mm Allen Bolt**



### Step 1


Assemble the provided Bracket to the IAG Tailgate Table Light.

Slide the Bracket onto the Light, the two pieces should be firmly held together by friction.




### Step 2

With the Tailgate Table Open, install the Light Assembly onto the IAG Tailgate Table as shown. Use provided 4mm Allen Bolt to secure.

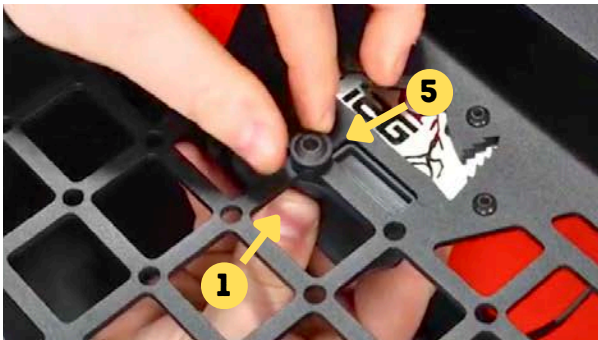


### Step 3

Tighten the 4mm Allen Bolt.

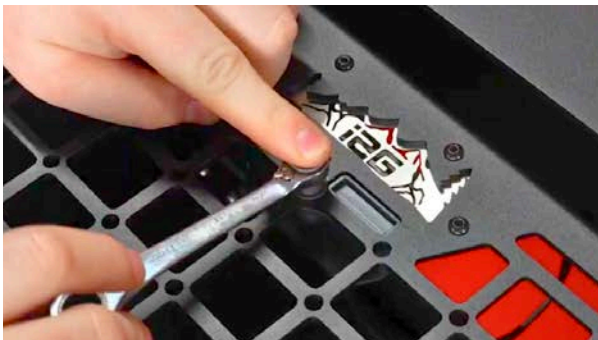


### Step 4

Connect the Extension Harness to the Tailgate Table Light.

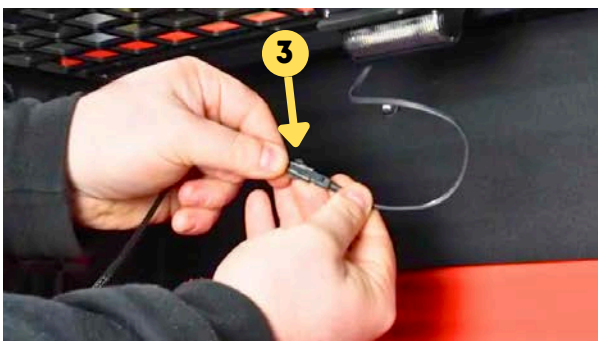

### Step 5

Install the two provided Wire Harness Clips underneath the top of the Tailgate Table as shown. Remove the adhesive backing from the Clips and apply.

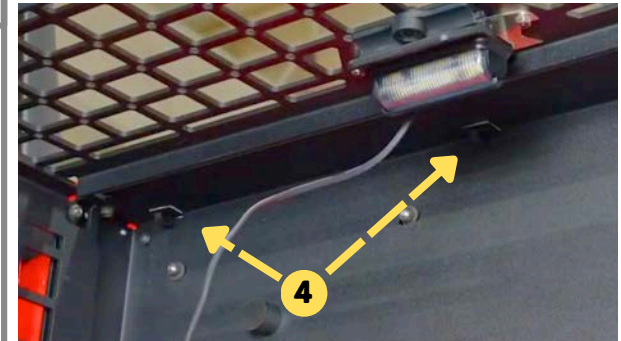


### Step 6

Secure the Wiring Harness into the Clips.




### Step 7

Remove the two 10mm nuts from the bottom of the Tailgate Table.

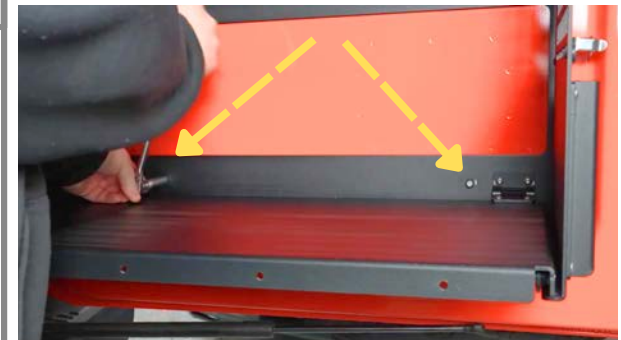


### Step 8

With the Tailgate Table loose, route the Wiring Harness behind the Table as shown.

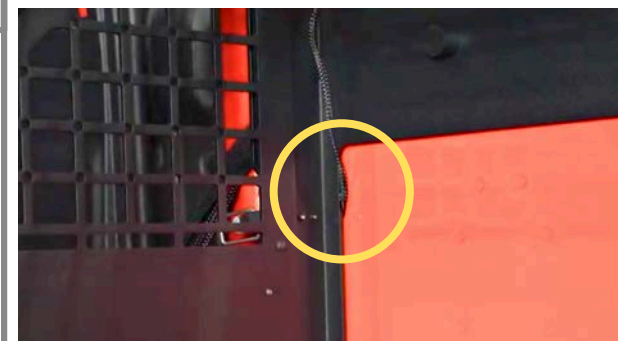

### Step 9

Reinstall and tighten the two 10mm nuts for the bottom of the Tailgate Table.

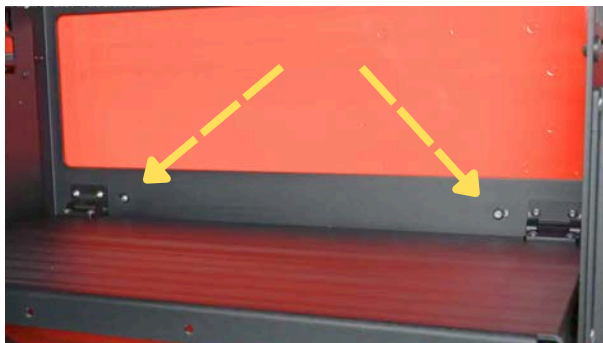

### Step 10

Close and latch the Tailgate Table.




### Step 11

For vehicles equipped with a Soft Top. Remove the 8mm bolt and Catch from the passenger side trunk panel.



### Step 12

Using a Plastic Trim Pry Tool, remove the trim from around the passenger side D Pillar.

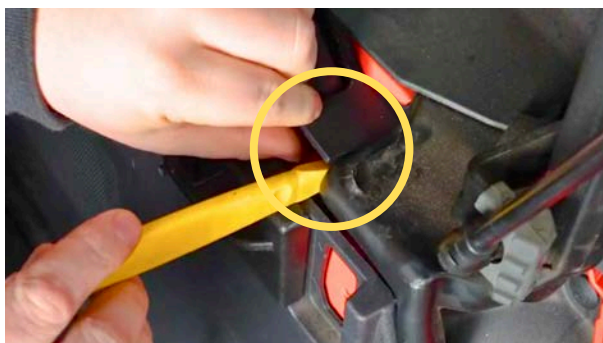

### Step 13

Using a Plastic Trim Pry Tool, loosen the Passenger Side Trunk Panel. Pull the Panel back enough to access the wiring harness behind, full removal is not necessary.




### Step 14

Locate the Connector for the Cargo Light behind the Trunk Panel. Disconnect the connector.




### Step 15

Connect the Extension Harness in-line with the Cargo Light connector.

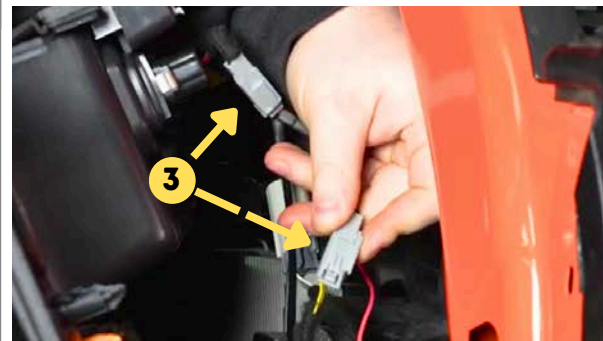

### Step 16

Zip-tie the Extension Harness along the factory Wiring Harness. Trim Excess Zip-tie with Cutting Pliers

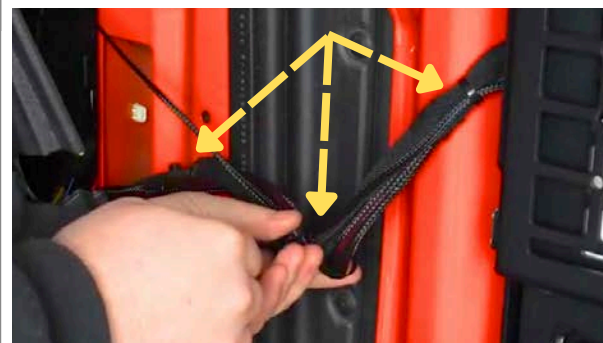

### Step 17

Reinstall the Trunk Panel and D-Pillar Trim.  
Ensure the wiring harness is routed correctly and is not being pinched by the Trunk Panel.



### Step 18

Confirm Operation of Tailgate Table Light.  
The Light operates with factory interior lighting.  
If factory interior lighting is currently off, close the trunk/doors and re-open.



### Auto-Off Feature

The IAG Tailgate Table Light has an internal timer that will automatically shut off after five minutes. Disconnecting and reconnecting the IAG Light at the extension harness will reset the internal timer.



### Finished

Enjoy your new Tailgate Table Light!

