



U.S. BASED SUPPORT

HOURS: MONDAY - FRIDAY | 8AM - 5PM EST



[1.410.840.3555](tel:14108403555)




support@iagoffroad.com



VIDEO INSTRUCTIONS

<https://iagoffroad.com/vi/IAG-ACC-F1090BK-OPT>

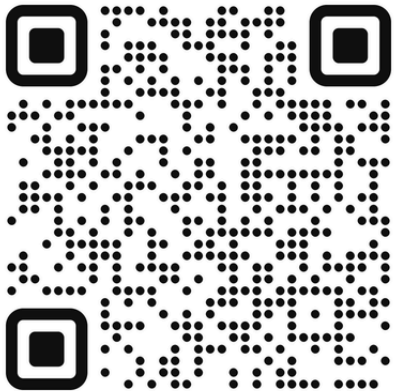

SCAN ME



**IAG OFF-ROAD
ENGINE OIL CAP
FOR 21+ BRONCO, 19+ RANGER,
15+ F-150 (GAS), 22+ MAVERICK**



IAG Off-Road Engine Oil Cap

For Bronco, Ranger, F-150 (Gas), Maverick

Part Number: IAG-ACC-F1090

Congratulations on the purchase of your Oil Cap, and thank you for choosing IAG Off-Road!

These instructions are intended for users with basic mechanical skills. Professional installation is not required.

Installation video can be found on our website, or by using the following QR code.

Tools Needed:

Socket/Wrench Sizes:

- Torx 6 Driver (Provided)

Scan or click QR code for instruction video:



Parts Included:




- 1 IAG Oil Cap
- 2 Color Ring
- 3 (X12) Bolts
- 4 (X2) IAG Sticker

Step 1


Prepare the IAG Oil Cap, Color Ring, and Twelve T6 Bolts.

Install the Color Ring onto the Oil Cap and secure with the provided Bolts. Tighten until snug.

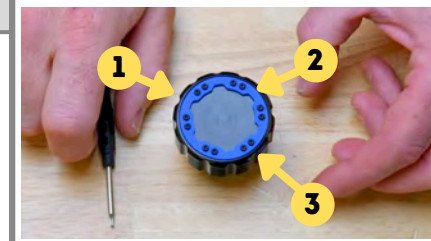

Step 1

Remove the factory Oil Cap.

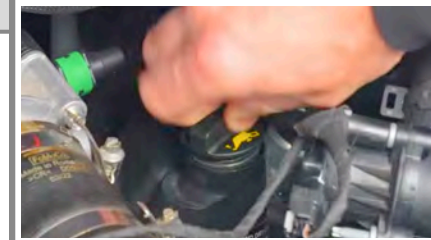

Step 1

Apply a small amount of oil to the O-Ring of the IAG Oil Cap.

Install the IAG Oil Cap.



Step 1

Apply the desired IAG Sticker (4) to the Oil Cap.

