

IAG Removable Dual Rear Cup Holder for Two & Four Door 2021+ Ford Bronco



IAG-ACC-F3067 - IAG Removable Dual Rear Cup Holder for Two & Four Door 2021+ Ford Bronco

Part# IAG-ACC-F3067

Congratulations on the purchase of your IAG Removable Dual Rear Cup Holder, and thank you for choosing IAG Performance. These instructions are intended for users with basic mechanical skills. Professional installation is not required. The average installation time is 10 minutes.

Video instructions can be found at the link below.

https://www.youtube.com/watch?v=Op5Bu_eWlJA&t=4s

Step 1/19



IAG-ACC-F3067 - IAG Removable Dual Rear Cup Holder for Two & Four Door 2021+ Ford Bronco


Part# IAG-ACC-F3067

Tools Required For Installation:

T20 Torx Driver

Step 2/19

Step 3/19

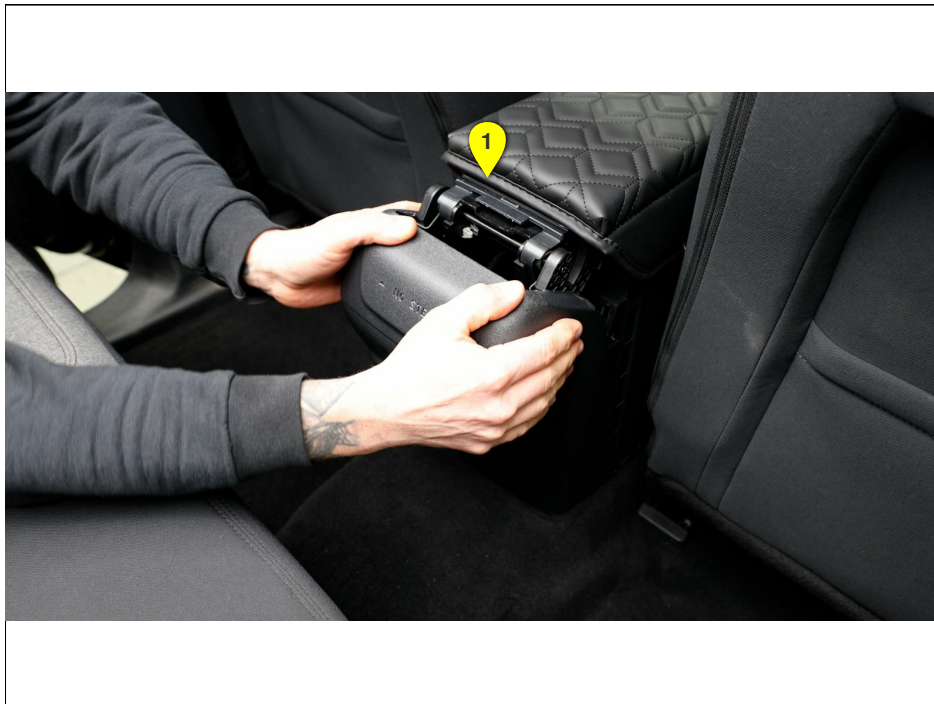

Numbered annotations (1)

- 1 Remove rear part of the center console by pulling firmly towards the rear of the vehicle.

Step 4/19

Numbered annotations (1)

- 1 Disconnect all of the wiring harnesses by pressing the release lever and pulling the harness connectors out.

**Step 5/19**

Numbered annotations (1)

- 1 Remove the two T20 Torx screws located under the power outlets.



Step 6/19


Numbered annotations (1)

- 1 Attach the cup holder bracket using the two previously removed T20 Torx screws. Ensure the cup holder bracket is flush with the bottom of the console.

**Step 7/19**

Numbered annotations (1)

- 1 Tighten the two T20 Torx screws.

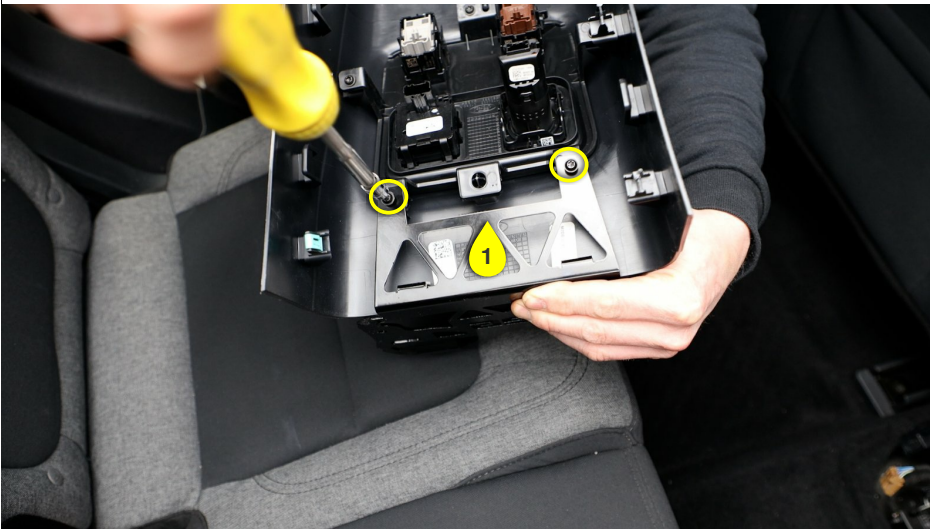

Step 8/19



Numbered annotations (1)

- 1 Apply adhesive promoter on the areas where adhesive velcro will be applied.

Step 9/19



Numbered annotations (1)

- 1 Identify the hook and loop sides of the velcro.

Step 10/19

Numbered annotations (1)

- 1 Apply the hook side of the velcro to the cupholder. Press firmly to apply.

**Step 11/19**

Numbered annotations (1)

- 1 Remove the adhesive backing from the loop side of the velcro.



Step 12/19

Numbered annotations (1)



- 1 Install the cupholder onto the bracket. Ensure the locating pins are locked into place.

Step 13/19

Numbered annotations (1)




- 1 Press firmly to apply loop side of the velcro to center console cover.

Step 14/19


Numbered annotations (1)

- 1 Apply pressure from both sides to ensure good adhesion.

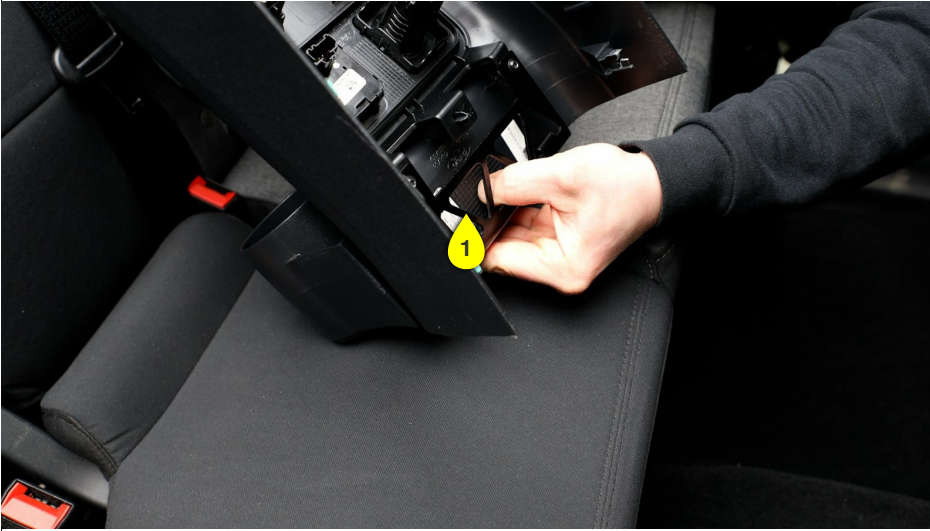**Step 15/19**

Numbered annotations (1)

- 1 Remove cupholder from bracket. Reinstall wiring harnesses into center console cover.

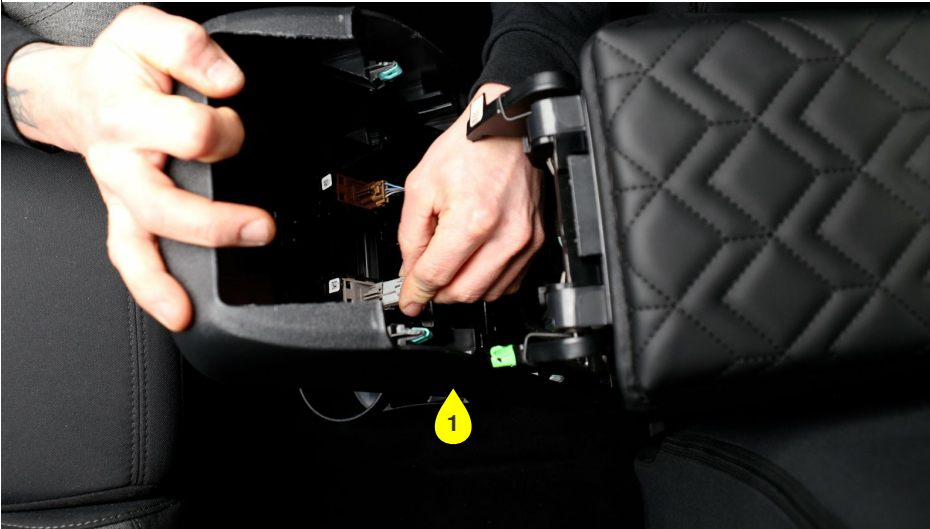

Step 16/19

Numbered annotations (1)

1 *If installing with factory floor mats*

Reinstall center console cover by pressing firmly to seat the clips. Ensure that center console cover is installed OVERTOP the lip of floor mat as shown.

**Step 17/19**

Numbered annotations (1)

1 *If installing with IAG I-Line Floor mats*

Reinstall center console cover by pressing firmly to seat the clips. Ensure that center console cover is installed OVERTOP the lip of floor mat as shown.



Step 18/19

Numbered annotations (1)

1 *If installing without floor mats*

Reinstall center console cover by pressing firmly to seat the clips.

Step 19/19

Numbered annotations (1)

1 Reinstall the cupholder onto the mount. The cupholder can be easily removed for cleaning as well as if the rear seats are folded down.