



INSTALLING THE IAG I-LINE DASH USB HUB

IAG-ACC-F3167 IAG
I-Line Dash USB Hub
for 2021+ Ford Bronco

Congratulations on the purchase of your IAG I-Line Dash USB Hub, and thank you for choosing IAG Off Road! These instructions are intended for users with basic mechanical skills. Professional installation is not required.



STEP#1 REMOVE DASHBOARD SWITCH PANEL

USE THE TRIM PANEL PRY TOOL TO REMOVE THE DASHBOARD SWITCH PANEL



STEP#2 UNCLIP THE WIRING HARNESS




STEP#3 REMOVE THE TWO TP15 BOLTS

REMOVE THE TWO TP15 BOLTS FROM THE DASH ACCESSORY MOUNT



STEP#4 REMOVE ACCESSORY MOUNT

USE THE TRIM PANEL PRY TOOL TO REMOVE THE ACCESSORY MOUNT

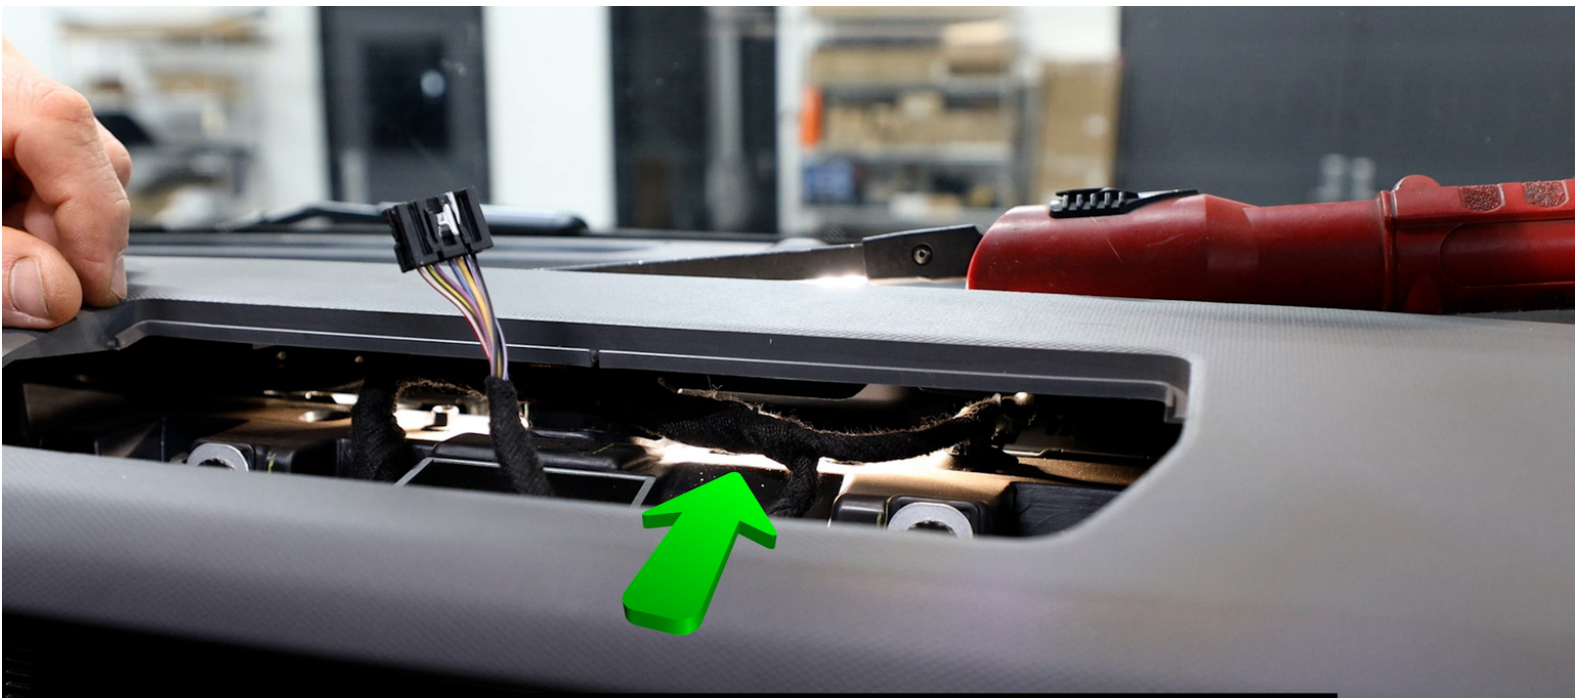

STEP#5 ROUTE THE WIRING HARNESS

ROUTE THE WIRING HARNESS UNDER THE FACTORY HARNESS



**STEP #6 ROUTE OTHER END OF WIRING HARNESS
DOWN CHANNEL IN DASH**




STEP #7 REMOVE ACCESSORY PLATE / HANDLE

REMOVE THE TWO T25 BOLTS FROM THE ACCESSORY PLATE OR HANDLE



STEP #8 REMOVE CENTER CONSOLE COVER

USE THE PROVIDED PRY TOOL TO REMOVE THE CENTER CONSOLE COVER

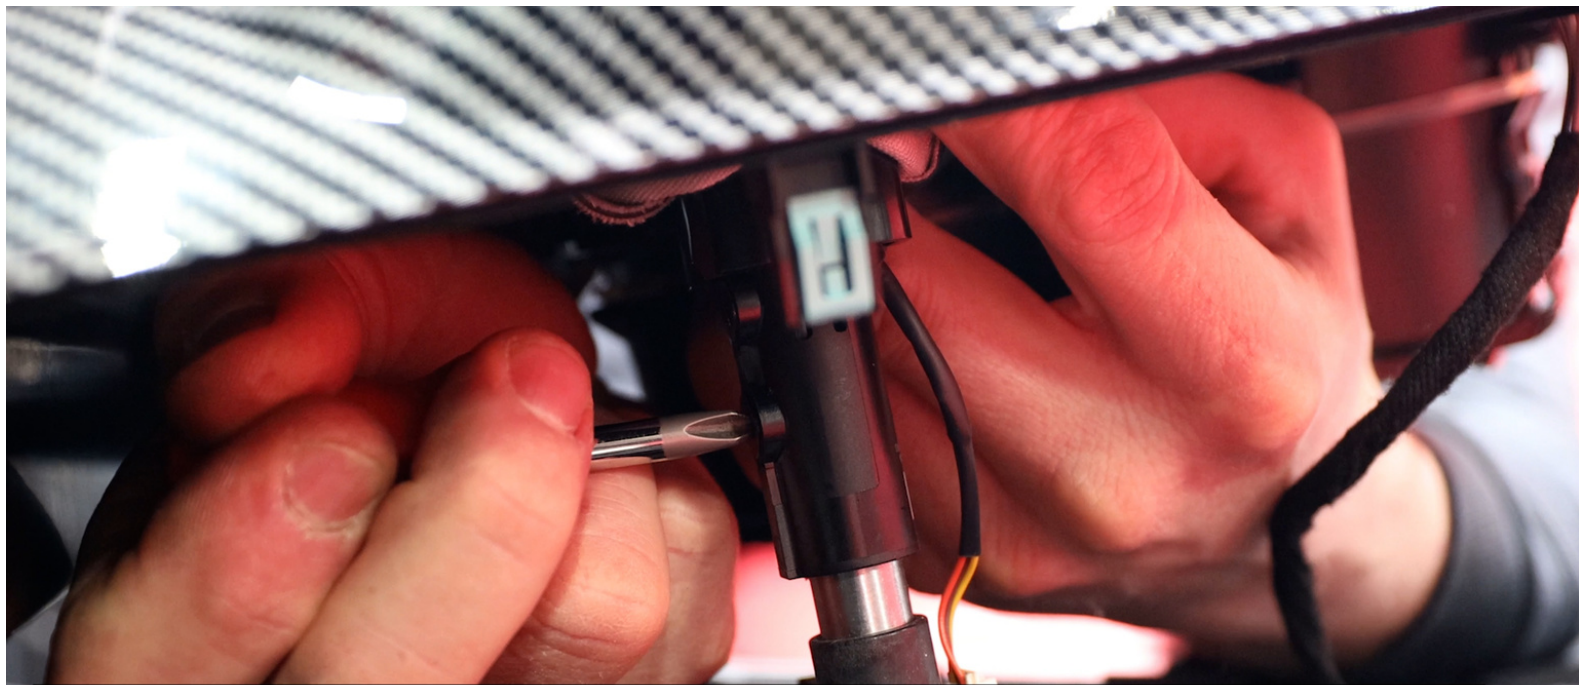

STEP #9 REMOVE THE TWO SET SCREWS

REMOVE THE TWO SET SCREWS FROM THE GEAR SELECTOR



STEP #10 DISCONNECT HARNESS

DISCONNECT THE GEAR SELECTOR HARNESS



STEP #11 DISCONNECT HARNESS

DISCONNECT THE GOAT MODE HARNESS



STEP #12 CONNECT INCLUDED T-HARNESS TO WIRE FROM STEP 6



STEP #13 DISCONNECT FACTORY CHARGER CONNECTOR



STEP #14 CONNECT FACTORY CABLE TO T-HARNESS



STEP #15 CONNECT T-HARNESS TO FACTORY CHARGER




STEP #16 REINSTALL GOAT MODE HARNESS

REINSTALL THE GOAT MODE WIRING HARNESS



STEP #17 REINSTALL GEAR SELECTOR HARNESS

REINSTALL THE GEAR SELECTOR WIRING HARNESS TO THE VEHICLE

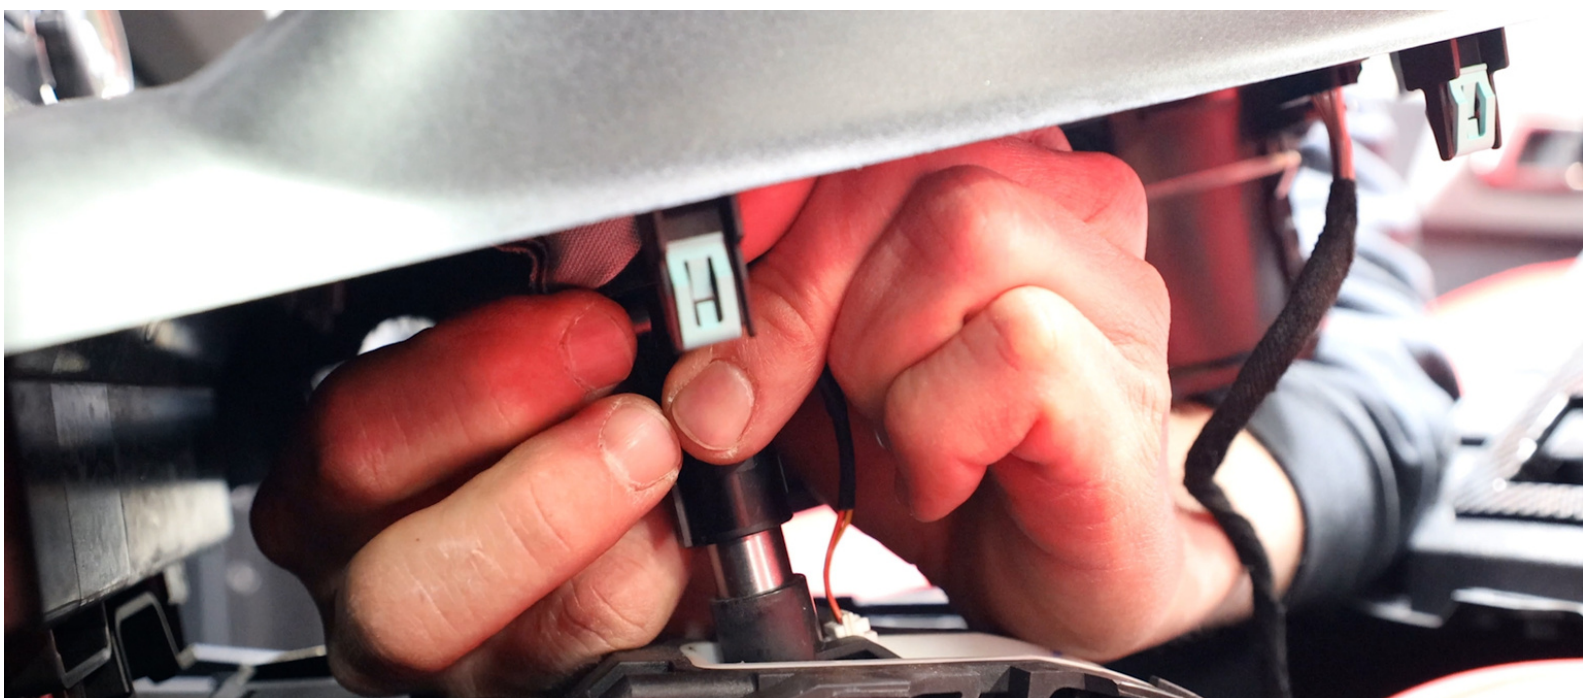

STEP #18 REINSTALL SELECTOR SET SCREWS

REINSTALL THE TWO GEAR SELECTOR SET SCREWS



STEP #19 REINSTALL CENTER CONSOLE

REINSTALL THE CENTER CONSOLE BY LINING UP THE CLIPS AND PUSHING DOWN



STEP #20 REINSTALL ACCESSORY PLATE / HANDLE

INSTALL THE TWO T25 BOLTS FROM THE ACCESSORY PLATE OR HANDLE